

PRODUCT INFORMATION

CONVENTION TAPE


This is a 13 mil cloth tape with a rubber based adhesive on both sides. It's designed for the convention and flooring industry.



Heavy Duty



Liquid Shield

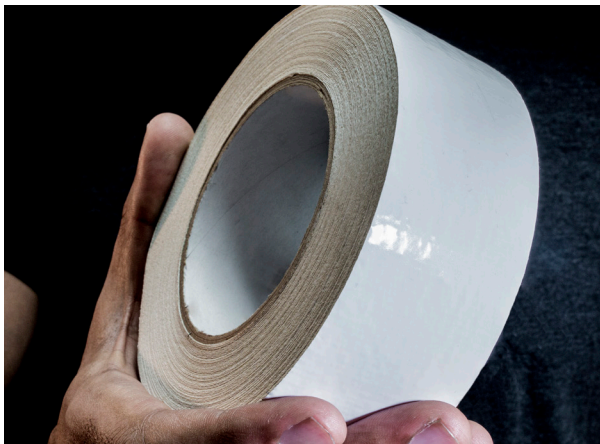

FEATURES

- Adhesive provides good shear resistance
- Leaves no residue upon removal

APPLICATIONS

- Temporary mounting for assembly or machining operations
- Print plate mounting
- Carpet installation where a more aggressive adhesive is required



PRODUCT SPECIFICATIONS

Thickness	13.0 mils
Material	Polyester cotton fabric, polyethylene release liner
Adhesive Type	Natural rubber, synthetic resins, fillers
Adhesion	50 oz/inch
Tensile Strength	40 lbs/in
Temperature (Ideal)	70° F
Humidity (Ideal)	Cool, Dry
Elongation (%)	n.a.
Chemical Name	n.a.
Chemical Family	n.a.
Chemical Formula	Proprietary
Trade Name	Convention Tape
Material Use	Holddown and assembly

INSTRUCTIONS

Application to Primary Surface:

Unwind adhesive film or tape and apply the adhesive side to the mounting surface. Apply firm pressure. Recommended application temperature to achieve best results is 65° F (18° C) or above. Proper bonding may not occur unless adhesive and surface material are both at 65° F (18° C) or above.

Application to Secondary Surface:

Peel off the protective release liner and apply the adhesive side to the desired surface. Apply firm pressure. Recommended application temperature to achieve best results is 65° F (18° C) or above. Proper bonding may not occur unless adhesive and surface material are both at 65° F (18° C) or above.

NOTE: 1. When applying pressure sensitive films to any surface, be sure that the surface is free from oil or other contaminants such as powders, dust or release agents. Adhesive performance should be carefully checked when used on substrates containing plasticizers.

HANDLING AND STORAGE

Store at room temperature. Do not store in extreme conditions over 95° F or below 40° F.

SAFETY

SDS sheets for Surface Shields products available by request.

The information in this document was obtained from sources which we believe reliable. The information is provided without any warranty expressed or implied regarding its correctness. We do not assume responsibility for loss, damage or expense in any way connected with the handling, storage, use or disposal of the product.

© 2015 Surface Shields, Inc. All rights reserved. Product names & attributes trademark of Surface Shields, Inc. where applicable.

5102.70

CORPORATE OFFICE

10457 163RD PLACE
ORLAND PARK, ILLINOIS 60467

P 844 4NO MESS
F 708 226 9817



surfaceshields.com